

KM2600MTTS

HYUNDAI WIA Multitasking Machine



Technical Leader

The multitasking machine KM2600MTTS, designed by HYUNDAI WIA with years of expertise and the latest technology, is designed to maximize productivity by utilizing twin spindles and mill head.




01

KM2600MTTS

Basic Features

Process-intensive 9-axis multi-tasking machine with the mill head, sub spindle and lower turret


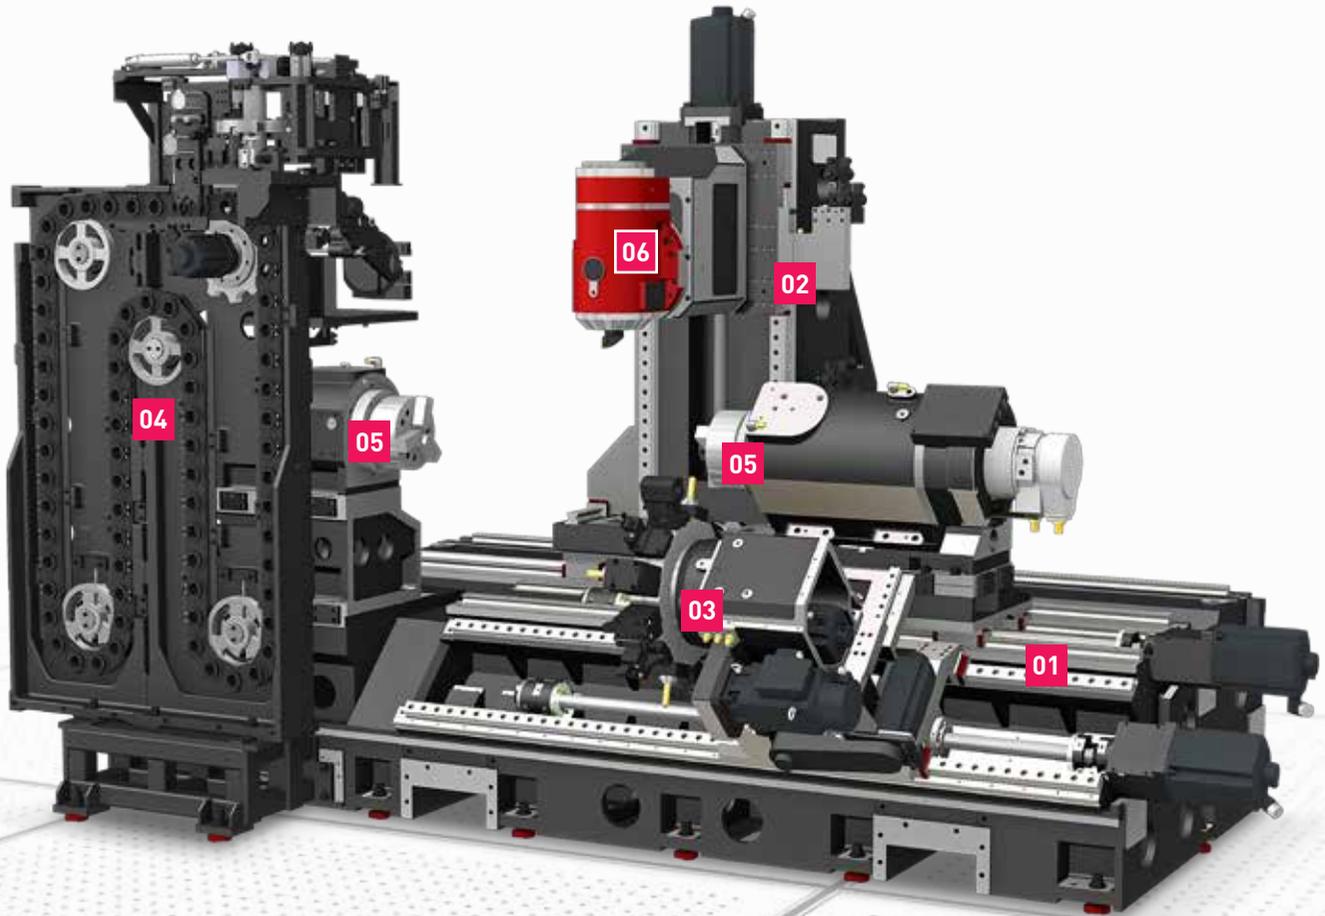


Excellent Performance & High Accuracy Cutting

- ⦿ **Rapid Traverse Rate** (X1/Z1/Y/X2/Z2/ZB axis) :
40/40/40/30/20/15 m/min (1,575/1,575/ 1,575/1,181/787/591 ipm)
- ⦿ **Travel** (X1/Z1/Y/X2/Z2/ZB axis) :
705/1,595/250/250/1,500/1,586 mm (27.8"/62.8"/9.8"/9.8"/59"/62.4")
- ⦿ **Mill Head** (B axis) : 240° (-30°~210°)
- ⦿ **Max. Turing Length** : 1,550 mm (61")
- ⦿ **Max. Turning Dia.** : Ø750 (29.5") (B axis 140°), Ø630 (24.8") (B axis 90°)

01 High Precision, High Rigidity Bed Structure

Z-axis in a 3-way structure is applied to remove any interference in conveyance between the tool station and 2nd spindle. Design in 45° slant ensures that cutting chips and cutting oil are discharged smoothly and both high strength and high precision can be maintained. Especially, the bed is analyzed in the FEM method to minimize factors that can be generated in the machining, such as thermal deformation, vibration, etc.

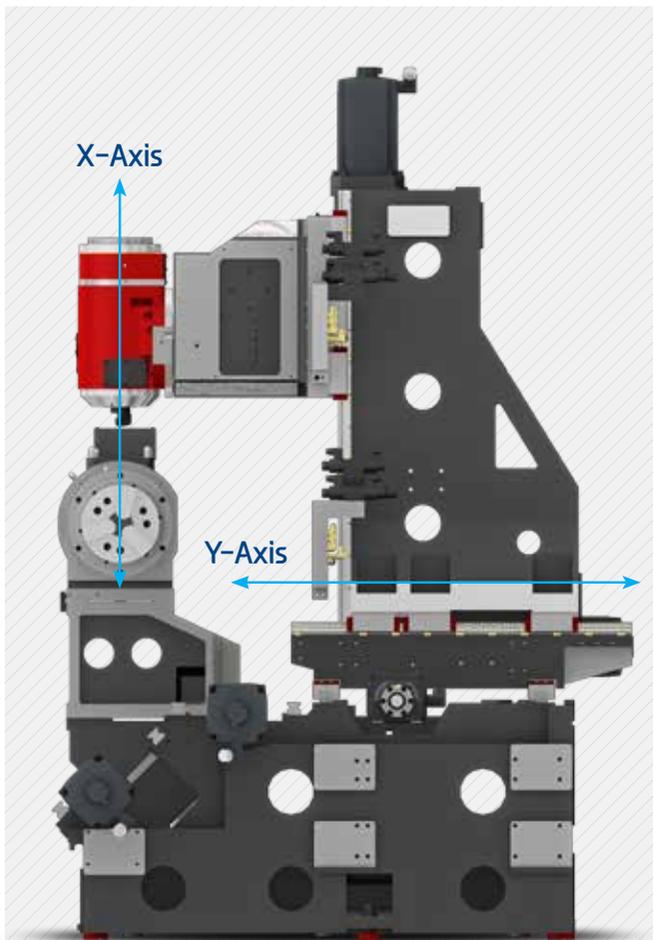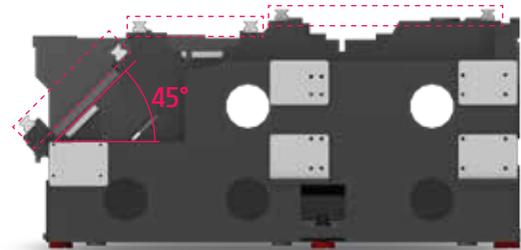


02 Cross Type Y-axis

The cross type Y-axis ensures the excellent positioning precision with the simple preparation and correction of program, which will give you a great help in increasing productivity.

KM2600MTS establishes the complex machining with the expanded machining area and increased machining precision only with the one-time chucking based on the balance of the mill head and the cross type Y-axis control in the column portable Y-axis.

03 BMT Lower Turret


The lower turret adopts 2 servo motors in good performance to ensure high durability and precision. Especially, the lower turret ensures the high-speed machining of complicated shapes in precision only with the one-time setting of an object to be machined with the mill head and complex machining.

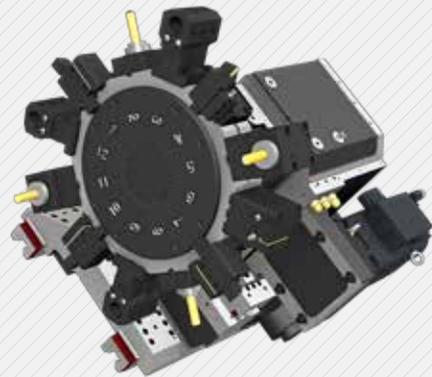

04 ATC & Magazine

The installation of magazine on the front provides the efficient tool exchange and tool setting. Magazine with chain driving method provides 36 tools as a standard, and 72 tools as an option.


ATC driven by a servo motor increases the positioning precision and control capability due to its tool exchange method in the cam index type.

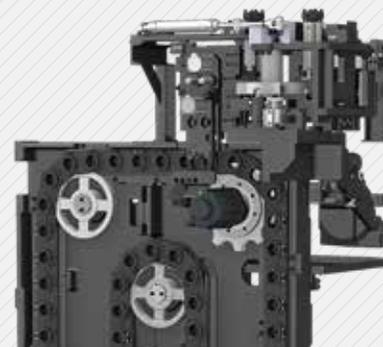

02 Spindle & Mill Head

KM2600MTTS

Spindle and mill head for the machining of various shapes in high precision

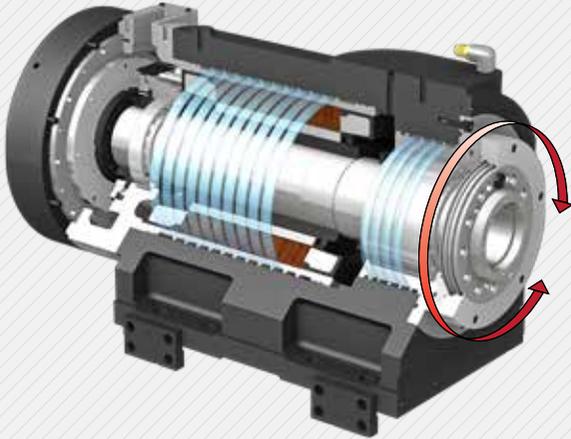

05 Built-In 10" Main & Sub Spindle

The built-in main and sub spindle with high precision is designed in a structure where the spindle head is separated from the base to minimize thermal displacement during the machining.



C Axis Control

Main and sub spindle can control 0.0001 degrees and this maximizes turning and milling conditions.

- ⊙ Spindle Speed : 4,000 r/min
- ⊙ Bar Capacity : Ø80 (3.1")

Mill Head

The mill head of KM2600MTTS, where the b-axis control can be done, is mounted with a high-resolution encoder having a DDM (Direct Drive Motor) and 0.0001° to secure high positioning precision. This shows highest machining performance among the same class.

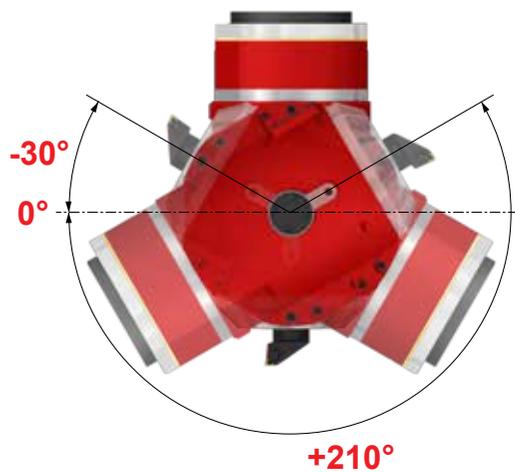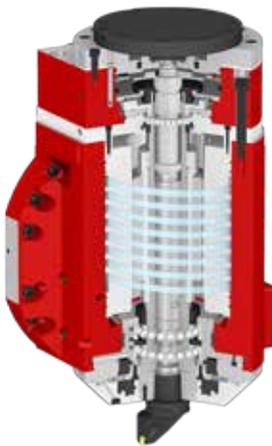


CAPTO-C6

Maximized cutting ability by applying double side circulation CAPTO-C6 as a standard.

- Ideal over load analysis
- Decreased tool change time by short taper



Machining Variation

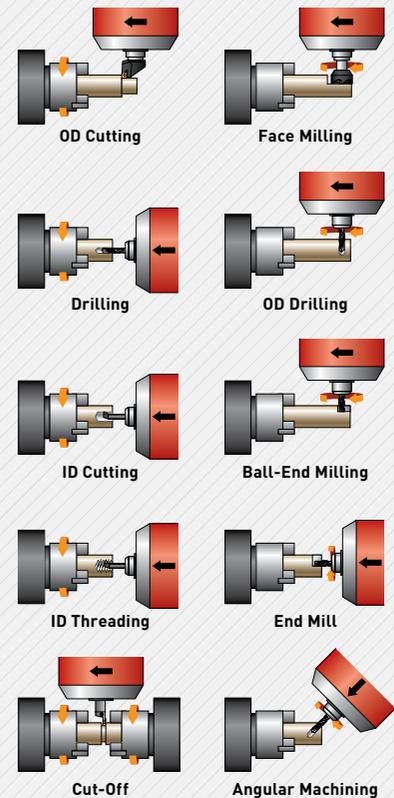

SPECIFICATIONS


Specifications

ITEM			KM2600MTTS	
CAPACITY	Max. Turning Dia. (Mill/Turret)	mm(in)	B axis 140° : Ø750(29.5"), B axis 90° : Ø630(24.8")/420 (16.5")	
	Max. Turing Length	mm(in)	1,550 (61")	
	Bar Capacity	mm(in)	Ø80 (3.1")	
SPINDLE	Chuck Size	inch	Main : 10", Sub : 10"	
	Spindle Speed	r/min	Main : 4,000, Sub : 4,000	
	Spindle Power	kW(HP)	Main : 30 (40.2), Sub : 26 (34.8)	
	Spindle Torque (Max./Cont.)	N·m(lbf·ft)	Main : 800/585 (590/431.5), Sub : 610/430 (449.9/317.2)	
	Spindle Nose	-	Main : A2-8, Sub : A2-8	
	Spindle Bore	mm(in)	Main : Ø91 (3.6"), Sub : Ø91 (3.6")	
	C axis indexing Angle	deg	Main : 0.0001°, Sub : 0.0001°	
FEED	Travel	X1/Z1/Y/X2/Z2/ZB	mm(in)	705/1,595/250/250/1,500/1,586 (27.8"/62.8"/9.8"/9.8"/59"/62.4")
		B	deg	240 (-30° ~ +210°)
	Rapid Traverse Rate (X1/Z1/Y/X2/Z2/ZB)	m/min(ipm)	40/40/40/30/20/15 (1,575/ 1,575/ 1,575/1,181/787/591)	
MILL HEAD	Spindle Speed	r/min	12,000	
	Spindle Power	kW(HP)	26 (34.8)	
	Spindle Torque (Max./Cont.)	N·m(lbf·ft)	120/75 (88.5/55.3)	
	Driven Type	-	Direct Drive Motor	
	Indexing Angle	deg	0.0001°	
TURRET	No. of Tools	EA	12	
	Tool Size (O.D/I.D)	mm(in)	□ 25/Ø40 (□ 1"/Ø1.6")	
	Milling Tool Speed	r/min	5,000	
ATC	Tool Storage Capacity	EA	36 [72]	
	Tool Shank Type	-	CAPTO C6	
	Max. Tool Dia. (W/O)	mm(in)	Ø90/Ø125 (3.5"/4.9")	
	Max. Tool Length	mm(in)	400 (15.7")	
	Max. Tool Weight	kg(lb)	12 (26.5)	
	Tool Selection Method	-	FIXED ADDRESS	
MACHINE	Floor Space(L×W)	mm(in)	4,919×3,463 (193.5"×136.3")	
	Height	mm(in)	2,896 (114")	
NC	Controller	-	SIEMENS 840D	

Specifications are subject to change without notice for improvement.

External Dimensions

unit : mm(in)

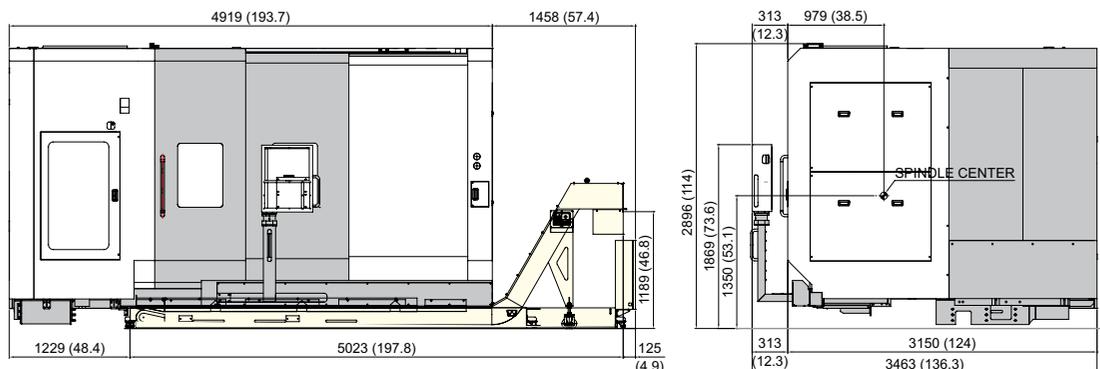

Head Office & Factory

153, Jeongdong-ro, Seongsan-gu, Changwon-si, Gyeongsangnam-do Tel +82 55 280 9206, 9299 Fax +82 55 210 9804

Overseas Sales Team

16F, 37, Cheoldobangmulgwan-ro, Uiwang-si, Gyeonggi-do Tel +82 31 593 8173

<http://machine.hyundai-wia.com>